




01 Camera Structure



02 What's in the Box



C611 Camera*1



DC5V 1A Power Adapter*1



Mounting Screw Bag*1




Mounting Template*1



Quick Start Guide*1


03 Installation Diagram

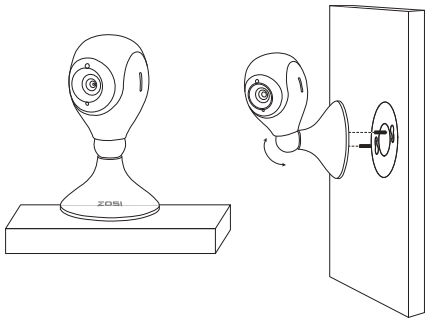

04 Register an Account


The following instructions take Android system as an example. The interface of IOS system will be somewhat different.

1. Scan the QR code above to download 'ZOSI Smart' (available for Android and iOS users. iOS users can scan the QR code with your phone's camera or directly search and download 'ZOSI Smart' in App Store).
2. Tap 'Register' to register your ZOSI account.

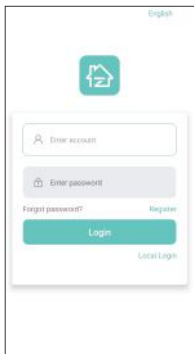


05 Add Device

1. Launch ZOSI Smart App, login and enter Device page, tap "+" in the top right corner and select 'Add Device'.
2. Select Camera C611.



3. Tap 'Scan QR Code' to scan the QR code on camera, or tap 'Enter device UID by manual' to enter the device UID and tap 'Confirm'.

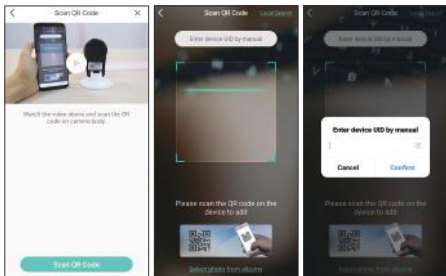

4. Enter the device name on the device information page and tap 'Add an unconnected device'.



5. On 'Connect to WiFi' page, select your WiFi and enter password.

NOTE: This camera does not support 5G wireless network. Please select 2.4G WiFi for wireless setup.


Tap 'Next' and enter Power on page, follow the video guide to plug in camera, 'Waiting to connect' will be prompted in about 30 seconds after the device starts. Tap 'Heard a tone' after hearing the tone.



6. On Scan QR Code page, follow the video guide to set up network for camera. Tap 'Scan QR Code' and point the QR code generated on the phone towards camera lens.



7. After hearing the prompt 'Wireless configuration succeed →WIFI is connecting, please wait → Wireless connection succeed', tap Next and Confirm in the pop-up. Tap Done and the device is successfully connected.

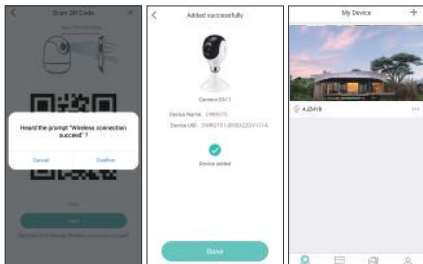

NOTE: If it fails to add the device, please check the following:

- 1.** Hear "WiFi connection failed"? Please check if the WiFi password is entered correctly.
- 2.** Please check if the device is plugged in.
- 3.** Make sure that the network connected to the mobile phone and the device can access the Internet normally.
- 4.** Confirm if there are firewall restrictions on your home network. It may be due to network reasons that the equipment cannot be connected to our server normally in result the device is not online.

5. If you cannot identify the cause, please reset the device and reconfigure the device network. If the cause cannot be identified, please reset the device and reconfigure the network. Insert the reset pin into the reset hole on the back for 5 seconds, and then add the device again according to the above steps.

06 AVSS Guide Book

Before adding device to PC Client, please ensure that the device has completed network configuration.

Download and install AVSS PC Client, follow the steps below to start setup.

Official download address: www.zositech.com

6.1 Login

Double-click "AVSS" icon to open the App, choose language and click login.

NOTE: Please register first if you don't have an account. It is recommended to log in with ZOSI Smart App's account or choose local login(no account and password is required) .



The image shows a login screen for the ZOSI app. At the top, the ZOSI logo is displayed in red, with the tagline "Security made easy." below it. The screen features three input fields: a language selector set to "English", a username field labeled "Enter your username:", and a password field labeled "Enter your password:". Below the password field, there are links for "Local Login" and "Forgot Password?". A checkbox labeled "Remember Password" is also present. A large red "Login" button is at the bottom, with a link "No account yet? Register immediately" below it.

ZOSI
Security made easy.

English

Enter your username:

Enter your password:

Local Login

Forgot Password?

Remember Password

Login

No account yet? [Register immediately](#)


6.2 Add Device

Click "Add Device" at the bottom of the device list to add device information.




Choose the device type: NVR/DVR/IPC etc, and enter the device name, device ID or instant identifier ID (Drag the device QR code or the screenshot of the sharing code into QR Code Identification Zone, user name, device password and channel number, and then save the setup.

NOTE: the default user name is "admin" and the default password for IPC is "admin". NVR/DVR does not need to enter a password. The number of camera channels should be the number of cameras, and the default is "1".

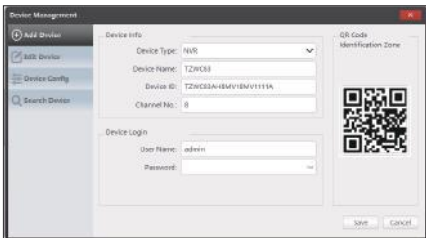

6.3 Live View

Select channel to watch live streaming.

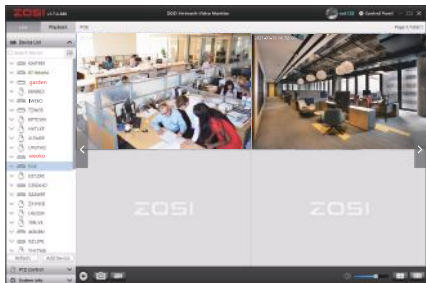

6.4 Video playback

Click Playback, select device, channel, date and time, click Play icon and start to replay the recorded videos.

